



About Us

OHAS is one of the leading manufacturer of innovative smart, intelligent & connected LED lighting solutions for indoor and outdoor applications, established in 2015 Our Biggest strength is presence of in housing R&D Team, testing and manufacturing facilities, Our idea is to create an illumination experience that make your space more desirable with high efficiency luminaire. We offer an unparalleled range of products for different application areas including modern workspaces, industries, retail, healthcare pharmaceutical firms, roads & highways, landscapes and many more. We are focusing to Design our luminaires with long life LEDs and drivers, suitable for robust conditions.

Lighting Calculator

IT Office, Reading (350 Lux)

Measurement Units ☒ Feet ☐ Meters

Length

Width

Height

illumination Intensity ☒ Low ☐ Medium ☐ High

Wall Color ☒ Light ☐ Dark

Light Placement ☒ Center ☐ Corner

Calculate

75625 Lumens will be required for a
2500 square - foot area to achieve
250 Lux

Option 1 : Use 21 Nos of 36W Glare free linear light
Option 2 : Use 84 Nos of 10W Deep Down
Option 3 : Use 76 Nos of 10W Task light

50 CRI	80 CRI	90+ CRI
COOL WHITE 5700K	NATURAL WHITE 4200K	WARM WHITE 2700K

Slim Panel

Mounting-Recess | Shape-Round, Square



IP | >40



CRI | >80



Lumens | >100/W

Slim panel

Edge lit

Anti glare

Aluminium body

External driver

Easy to install

○ Round

Wattage	Code	Dimension	Mounting Cut out size	CCT	Master box	MRP
6W	DL21-06W	116x32(H)	4 inch		30	₹390
9W	DL21-09W	116x32(H)	4 inch		30	₹410
12W	DL21-12W	150x35(H)	5 inch		25	₹570
15W	DL21-15W	150x35(H)	5 inch		25	₹610
18W	DL21-18W	166x35(H)	6 inch		20	₹820

□ Square

6W	DL22-06W	116x32(H)	4 inch		30	₹390
9W	DL22-09W	116x32(H)	4 inch		30	₹410
12W	DL22-12W	150x35(H)	5 inch		25	₹570
15W	DL22-15W	150x35(H)	5 inch		25	₹610
18W	DL22-18W	166x35(H)	6 inch		20	₹820

Surface Panel

Mounting-Surface | Shape-Round, Square



IP | >40



CRI | >80



Lumens | >100/W

Slim panel

Edge lit

Anti glare

Aluminium body

External driver

Easy to install

○ Round

Wattage	Code	Dimension	Mounting Surface	CCT	Master box	MRP
9W	DL23-09W	116x32(H)	Twist & Lock fit		30	₹530
12W	DL23-12W	150x35(H)	Twist & Lock fit		25	₹670
15W	DL23-15W	150x35(H)	Twist & Lock fit		25	₹790
18W	DL23-18W	166x35(H)	Twist & Lock fit		12	₹950

□ Square

9W	DL24-09W	116x32(H)	Twist & Lock fit		30	₹530
12W	DL24-12W	150x35(H)	Twist & Lock fit		25	₹670
15W	DL24-15W	150x35(H)	Twist & Lock fit		25	₹790
18W	DL24-18W	166x35(H)	Twist & Lock fit		12	₹950

Down Light-PC

Mounting-Recess | Shape-Round, Square



IP | >40



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >100/W

Surface panel

Edge Light

PC body

Anti glare

External Driver

Easy to install

Wattage	Code	Dimension	Mounting Cut out size	CCT	Master box	MRP
9W	DL31-09W	116x32(H)	4 inch	  	30	₹370
12W	DL31-12W	150x35(H)	6 inch	  	30	₹520
15W	DL31-15W	150x35(H)	6 inch	  	20	₹550

9W	DL32-09W	116x32(H)	4 inch	  	30	₹370
12W	DL32-12W	150x35(H)	6 inch	  	30	₹520
15W	DL32-15W	150x35(H)	6 inch	  	20	₹550

Surface Down light

Mounting-Surface Shape-Round, Square



IP | >20



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumen | >100/W

Surface panel

Edge Light

PC body

Anti glare

External Driver

Easy to install

Wattage	Code	Dimension	Mounting Surface	CCT	Master box	MRP
9W	DL33-09W	116x32(H)	Twist & Lock fit	  	40	₹390
12W	DL33-12W	150x35(H)	Twist & Lock fit	  	40	₹550
15W	DL33-15W	150x35(H)	Twist & Lock fit	  	20	₹600

9W	DL34-09W	116x32(H)	Twist & Lock fit	  	40	₹390
12W	DL34-12W	150x35(H)	Twist & Lock fit	  	40	₹550
15W	DL34-15W	150x35(H)	Twist & Lock fit	  	20	₹600

Down Light MOON

Pocket-Friendly | Durable Light



IP | >20



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >100/W

Slim Border

BackLit

Polycarbonate Body


Anti glare

In-Built Driver

Plastic	Wattage	Code	Dimension	Mounting Cut out size	CCT	Master box	MRP
	7W	DL31-07W	116x32(H)	4 inch	  	40	₹280
	9W	DL31-09W	116x32(H)	4 inchz	  	20	₹290
Aluminium	Wattage	Code	Dimension	Mounting Cut out size	CCT	Master box	MRP
	7W	DL32-07W	116x32(H)	4 inch	  	40	₹340
	9W	DL32-09W	116x32(H)	4 inchz	  	20	₹350

Down Light cct

3 in 1 | Mood lighting

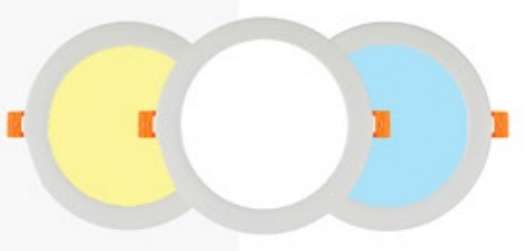

IP | >20



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >80/W

Slim Border

BackLit

Polycarbonate Body


Anti glare

In-Built Driver

3 In 1	Wattage	Code	Dimension	Mounting Cut out size	CCT	Master box	MRP
	7W-CCT	DL33-CCT	116x32(H)	4 inch	3 In 1	20	₹400

Down Light COLOUR

Colour | MoodLighting

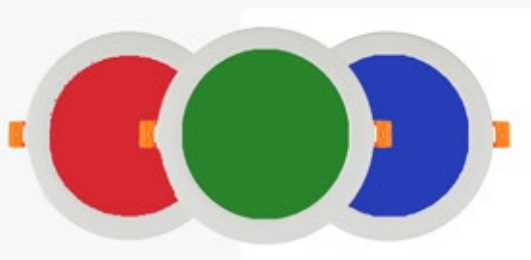

IP | >20



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >80/W

Slim Border

BackLit

Polycarbonate Body

Anti glare

In-Built Driver

Wattage	Code	Dimension	Mounting Cut out size	CCT	Master box	MRP
7W	DL34-Colour	116x32(H)	4 inch	  	20	₹320

Track Light

Strong focused Beam | High CRI



IP | >20



CRI | >90



Lumens | >100/W

Modren & Stylish designy

360 Adjusted

Track mounted

Spot Light

Internal Driver

Aluminium Body

Wattage	Code	Dimension	Mounting Cut out size	CCT	Master box	MRP
12W	COB31-12	75X75(L)	Track		10	₹1400
20W	COB31-20	75X135(L)	Track		06	₹1900
30W	COB31-30	95X150(L)	Track		06	₹2430

Surface-Track Light

Strong focused Beam | High CRI



IP | >20



CRI | >90



Lumens | >100/W

Modren & Stylish designy

360 Adjusted

Track mounted

Spot Light

Internal Driver

Aluminium Body

Wattage	Code	Dimension	Mounting Cut out size	CCT	Master box	MRP
12W	COB32-12	60X115(L)	Surface		10	₹1400
20W	COB32-20	60X115(L)	Surface		06	₹1900
30W	COB32-30	80X145(L)	Surface		06	₹2430

COB-Cylinder

Strong focused Beam | High CRI



IP | >20



CRI | >90



Lumens | >100/W

Modren & Stylish designy

360 Adjusted

Track mounted

Spot Light

Internal Driver

Aluminium Body

Wattage	Code	Dimension	Mounting Cut out size	CCT	Master box	MRP
12W	COB33-12	60X115(L)	Surface		10	₹1400
20W	COB33-20	60X115(L)	Surface		06	₹1900
30W	COB33-30	80X145(L)	Surface		06	₹2430

COB-Down light

Strong, focused beam Pocket-Friendly



IP | >20



SURGE PROTECTION | > 4 KV internal



CRI | >80



Lumen | >100

Modren & Stylish designy

360 Adjusted

Track mounted

Spot Light

Internal Driver

Aluminium Body

Wattage	Code	Dimension	Mounting Cut out size	CCT	Master box	MRP
10W	COB34-10	60X115(L)	4 Inch	  	10	₹750
20W	COB34-20	60X115(L)	4 Inch	  	06	₹1350
30W	COB34-30	80X145(L)	5 Inch	  	06	₹1700

COB-Spot

Strong, focused beam Pocket-Friendly



IP | >20



SURGE PROTECTION | > 4 KV internal



CRI | >80



Lumen | >80

Light weight

Easy to install

Brightness

Value for money

Polycarbonate

Wattage	Code	Dimension	Mounting Cut out size	CCT	Master box	MRP
02W	BT31-02	25X25	1 Inch	  	50	₹160

Gate -Light

Strong, focused beam Pocket-Friendly



IP | >65



SURGE PROTECTION | > 4 KV internal



CRI | >80



Lumen | >80

Ambient Light

Ground Mounted

Path Light

Internal Driver

Metal finishing

Decorative Lighting

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
10W	GT21-10	200X115(D)	Wall	  	04	₹2000
10W	GT22-10	150X80(D)	Wall	  	04	₹1600
10W	GT22-10	150X80(D)	Wall	  	04	₹1600

Batten

Pocket-Friendly



IP | >22



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >100/W

Light weight

Easy to install

Brightness

Value for money

Polycarbonate

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
5W	BT21-05	1 Feet	Clamp	6500	50	380
10W	BT21-10	2 Feet	Clamp	6500	50	400
20W	BT21-20	4 Feet	Clamp	6500	50	450
22W	BT21-22	4 Feet	Clamp	6500	50	450

LED Strip

Ultra-bright smooth even light spread



IP | >20



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >100/W

High luminous efficacy

Flexible ribbon

This PCB

IP 20

Cove -Lighting

Voltage	Code	No. of Led/M	Roll Size	CCT	Master box	MRP
12 DC	LS21-60	60	5 Meter		10	500
12 DC	LS21-120	120	5 Meter		10	700
12 DC	LS21-180	180	5 Meter		10	800

Sticker

Suitable for Junction box Pocket-Friendly



IP | >20



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >80/W


Light weight

Easy to install

Brightness

Value for money

Polycarbonate

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
3W	BT31-02	60X60X30	Surface		50	160

Linear Suspended light

Extremely versatile | Fosters efficiency



IP | >44



SURGE PROTECTION | > 4 KV internal



CRI | >80



Lumen | >100

Task lighting
Light layering
Highly Aesthetic
Aluminium Body

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
32W	LL21-32W	1100X70X40	Surface	  	4	4000
40W	LL21-40W	1100X70X41	Surface	  	4	4000

2x2 Panel

Suitable for Gypsum Tiles 2 X 2



IP | >20



SURGE PROTECTION | > 4 KV internal



CRI | >80



Lumen | >90

High luminous flux
CRCA Body
Easy to install
Easy replace
Translucence diffuser

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
36W	PL31-32W	590x590x70	570x570	  	4	2200
48W	PL31-40W	590x590x70	570x570	  	4	2400

2x2 Slim Panel

Highest efficiency and optimum



IP | >44



SURGE PROTECTION | > 3 KV internal



CRI | >80



Lumen | >90

Ultra Slim
Good heat dissipation
Easy to install
Easy to replace
Perfect for low ceiling
Available in wide range

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
32W	PL32-32W	590x590x15	570x570	  	4	2400
40W	PL32-40W	590x590x15	570x570	  	4	2600



Street Light

High performance IP66 LED streetlight



IP | >65



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >100/W

High luminous efficacy

Potted isolated Driver

Aluminium Body

IP 65

Street light distribution

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
20 W	SL21-20	300X115X45	Pole Bkt	6500	25	960
30 W	SL21-30	350X125X45	Pole Bkt	6500	25	1170
50 W	SL21-50	400X150X45	Pole Bkt	6500	20	1620
100W	SL21-100	450X180X55	Pole Bkt	6500	10	2065



Astro-Street Light

High performance IP66 LED streetlight



IP | >65



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >100/W

High luminous efficacy

Potted isolated Driver

Aluminium Body

IP 65

Street light distribution

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
50W	SL23-50-Eco	400X150X45	Pole Bkt	6500	10	1170
50W	SL23-50	320X112X45	Pole Bkt	6500	10	1620

Eco-Street Light

High performance IP66 LED streetlight



IP | >65



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >100/W

High luminous efficacy

Potted isolated Driver

Aluminium Body

IP 65

Street light distribution

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
30W	SL22-30-Eco	260X112X45	Pole Bkt	6500	10	990
50W	SL22-50-Eco	320X112X45	Pole Bkt	6500	10	1325

Flood Light Glass

IP 66 Flood Light With Glass



High luminous efficacy

High density light

Potted isolated Driver

Aluminium Body

120° Beam angle

Beam angle 120°	Wattage	Code	Dimension	Mounting t	CCT	Master Packing	MRP
	30 W	FLG21-30	180X180X40	Cradle		30	1280
	50 W	FLG21-50	220X220X50	Cradle		20	1630
	100W	FLG21-100	270X280X55	Cradle		8	2580
	150 W	FLG21-150	350X290X75	Cradle		4	4560
	200W	FLG21-200	350X290X75	Cradle		4	6280

ECO	Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
	30W	FLG22-30	180X180X40	Cradle		30	1100
	50W	FLG22-50	220X220X50	Cradle		30	1500

Flood light Lens

High performance IP 66 Flood Light With Lens



Lens model

High luminous efficacy

High density light

Potted isolated Driver

Aluminium Body

90° Beam angle

Wattage	Code	Dimension	Mounting	CCT	Master Packing	MRP
20 W	FLL 20	140x125x55	Cradle		20	920
30 W	FLL 30	140x125x55	Cradle		20	920
50 W	FLL 50	250x180x50	Cradle		20	1500
100W	FLL 100	290x230x45	Cradle		8	2500
200W	FLG 200	370x270x65	Cradle		4	4830

Spike Light

Waterproof Path Light With Spike Stand



IP | >65



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >100/W

Spot Light

Ground Mounted

Beam Light

Internal Driver

Aluminium Casting

Decorative Lighting

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
06W	GL-21-06	78x70	Ground	3000	10	1200
12W	GL-21-06	86x75	Ground	3000	10	1600

Bollard light

Contemporary | Cylindrical



IP | >65



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >100/W

Ambient Light

Ground Mounted

Path Light

Internal Driver

Metal finishing

Decorative Lighting

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
12W	WL-21-06	120x120X300	Ground	3000	04	4000
12W	WL-21-06	120x120X600	Ground	3000	04	4800

20

Foot Light

Suit your home style



IP | >65



SURGE PROTECTION | >4 KV Internal



CRI | >80



Lumens | >100/W

Path Light

Wall Mounting

Beam Light

Internal Driver

Aluminium Casting

Decorative Lighting

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
4W	WL-23-04	120x120x300	Wall	3000	20	000



2 Way Wall Light

Beam Facade Wall Light



IP | >65



SURGE PROTECTION | >6 KV Internal



CRI | >80



Lumens | >100/W

Up-down Light

Wall Mounting

Beam Light

Internal Driver

Aluminium Casting

Decorative Lighting

Wattage	Code	Dimension	Mounting Cut out size	CCT	Master box	MRP
6W	WL-21-06	80x58x33(T)	Wall	3000	20	720
12W	WL-21-12	80x95x40(T)	Wall	3000	20	1050
18W	WL-21-18	80x152x40(T)	Wall	3000	20	1360



K-light

Beam Facade Wall Light



IP | >65



SURGE PROTECTION | >6 KV Internal



CRI | >80



Lumens | >100/W

Up-down Light

Wall Mounting

Beam Light

Internal Driver

Aluminium Casting

Decorative Lighting

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
6W	KL-22-06	76x81x64(T)	Wall	3000	20	700
12W	KL-22-12	145x81x64(T)	Wall	3000	20	900



4 Way Light

Beam Facade Wall Light



IP | >65



SURGE PROTECTION | >6 KV Internal



CRI | >80



Lumens | >100/W

Four Direction

Wall Mounting

Beam Light

Internal Driver

Aluminium Casting

Decorative Lighting

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
12W	KL-23-12	70x70x54(T)	Wall	3000	20	1120
12W	KL-23-12	70x70x54(T)	Wall	4 Color	20	1320

HighBay- Optima

Wide Spread | Maintenance free



IP | >65



CRI | >80



Lumens | >100/W

High luminous efficacy

High density light

Potted isolated Driver

Aluminium Casting

Eye bolt /cradel mounting

90° Beam angle

Wattage	Code	Dimension	Weight	CCT	Master Packing	MRP
100W	HBL-21-100	200X200X175	1.5 kg	6500	8	3680
150W	HBL-21-150	400X200X175	2.1 kg	6500	4	5150
200W	HBL-21-200	400X200X175	2.5 kg	6500	4	6000
400W	HBL-21-400	400X400X175	5.0 kg	6500	2	12000

Beam angle 90°

HighBay-UFO

Wide Spread | Maintenance free



IP | >65



CRI | >80



Lumens | >100/W

High luminous efficacy

High density light

Potted isolated Driver

Aluminium Casting

Eye bolt /cradel mounting

60 and 90° Beam angle

Wattage	Code	Dimension	Weight	CCT	Master Packing	MRP
100W	HBL-22-100	225X225X175	1.7 kg	6500	4	4000
150W	HBL-22-150	275X275X175	2.4 kg	6500	4	5000
200W	HBL-22-200	310X310X175	3.5kg	6500	2	7000

Beam angle 90°

Canopy Light

Petrol Station| Easy to install



IP | >65



CRI | >80



Lumens | >100/W

Adjustable mounting

Uniform distribution

Potted Driver

Aluminium Casting

Easy to maintain

Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
80W	HBL-23-80	225X225X77	Recess	6500	2	4500



IP | **>65**



SURGE PROTECTION | **>6 KV Internal**



CRI | **>80**



Lumens | **>100/W**

Well Glass

Non flame proof well glass

Mounting -Eye Bolte

Uniform distribution

Potted Driver

Aluminium Casting

Easy to maintan

Beam angle 120°	Wattage	Code	Dimension	Mounting	CCT	Master box	MRP
	35W	WG-21-35	225X225X175	Eye Bolt	6500	10	On Request
	40W	WG-21-40	225X225X175	Eye Bolt	6500	10	On Request

Spare Drive

Notes...



TERMS & CONDITION

- MRPs are in INR (Inclusive of GST).
- Warranty is applicable as per ETRONICS warranty policy.
- Prices are subject to change without notice
- All prices are subject to Etronics general terms and conditions of business.
- This list price list supersedes all previous price lists.
- Every effort has been made to ensure accuracy in the compilation of technical/commercial detail within this publication.
 - Specification and performance data are constantly changing; current details should, therefore, be checked with the company.
- Company reserves the right to issue amendments, which may arise due to any errors in the price list .
- Specifications are subject to change without prior notice due to continuous up-gradation of technology

Office address-

Office address-

Office address-